


INFORMATION

Integra Open Cell Paralite System is comprised of "V" shaped profiles (Anti-iridescent, semi-specular, anodised aluminium) which is ideal for places requiring high light density (Video terminals, showrooms, shops, banks etc). Integra Paralite ceiling acts as a diffuser for both natural and artificial light sources, impeding shining.

SYSTEM COMPONENTS

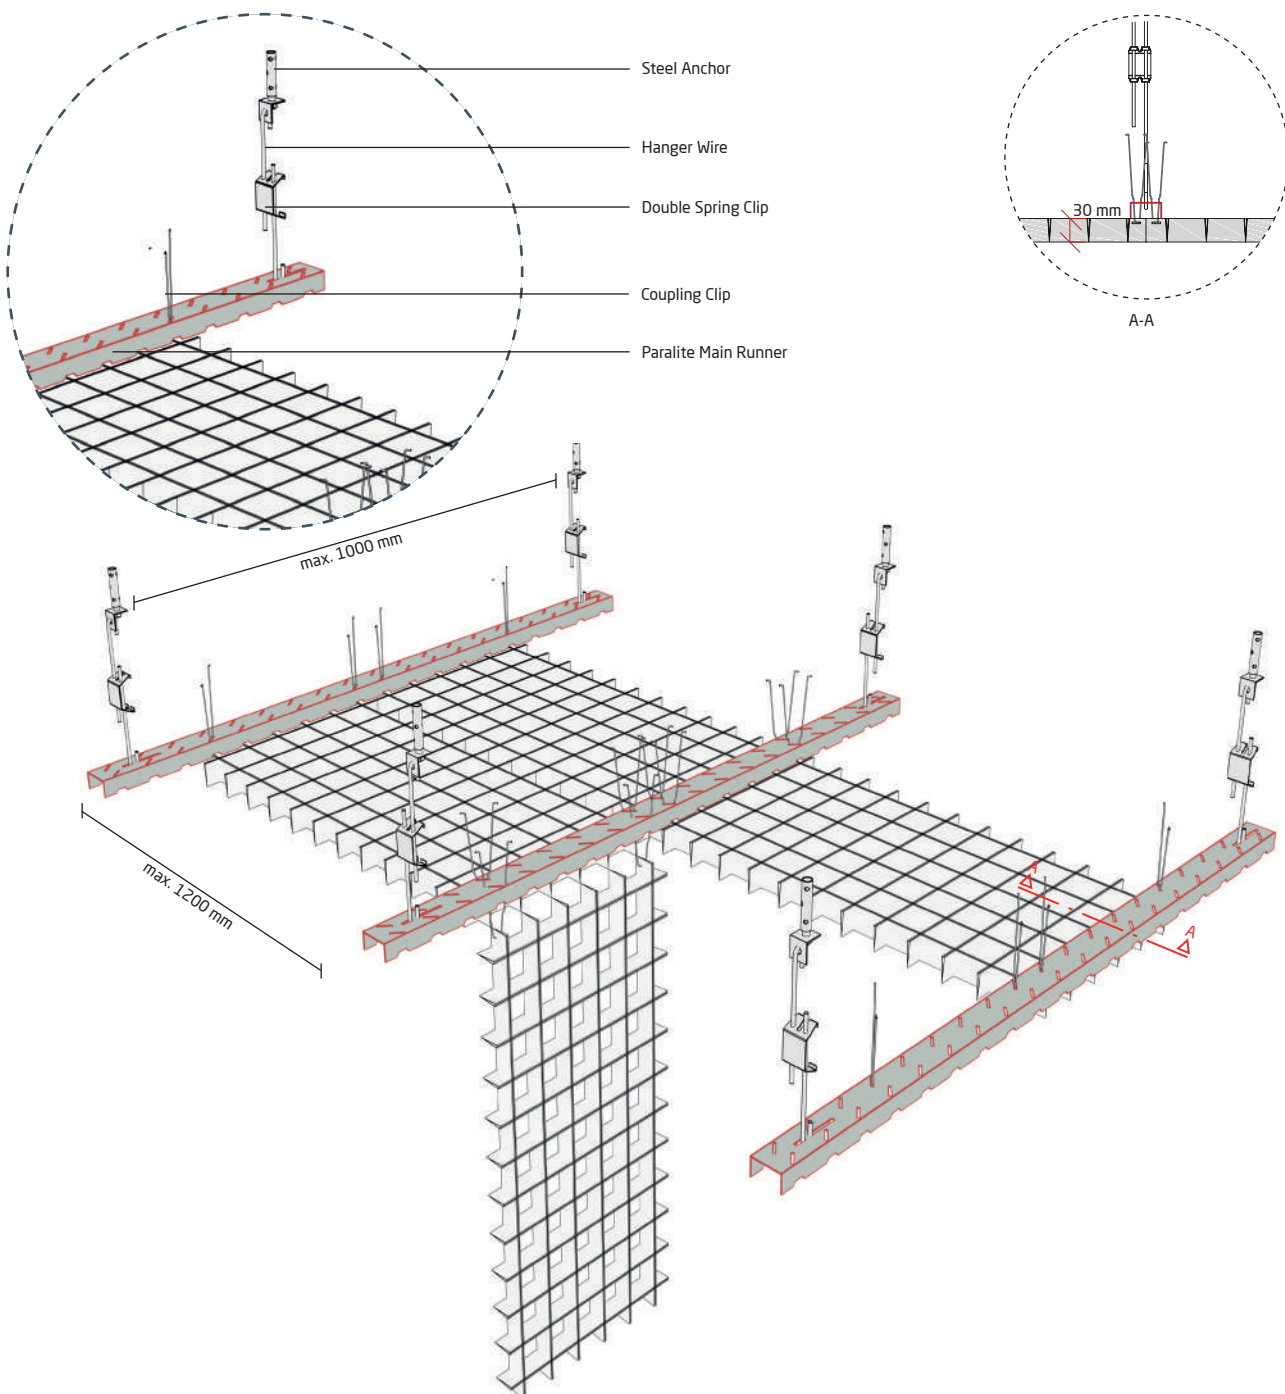

SPECIFICATIONS

PRODUCT	Width (mm)	Length (mm)	Height (mm)	Cell (mm)	Thickness (mm)
Paralite Panel	600	1200	30	50-75-100	0.4
	800	800	30	50-75-100	0.4

PROFILE AND ACCESSORIES

Paralite Main Runner	40	1800	20		1
Carrier Splice					
Coupling Clip					
Double Spring Clip				0.5	
Hanger Wire			1000	4	
Steel Anchor				8	
Grida L Wall Angle	19-19	3050			0.5

RAW MATERIALS

Aluminium

For other raw material options please contact "Sales Department".

